



Capacitors

Ceramic Capacitor

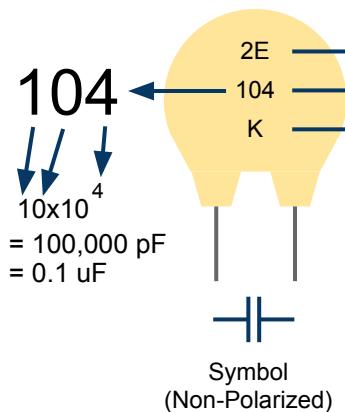

Electrolytic Capacitor

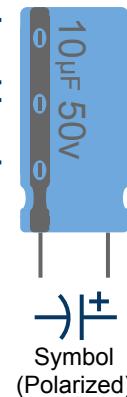

Max. Operating Voltage

Code	Max. Voltage
1H	50V
2A	100V
2T	150V
2D	200V
2E	250V
2G	400V
2J	630V

Capacitance Conversion Values

Microfarads (μF)
0.000001 μF
0.00001 μF
0.0001 μF
0.001 μF
0.01 μF
0.1 μF
1 μF
10 μF
100 μF

Nanofarads (nF)
0.001 nF
0.01 nF
0.1 nF
1 nF
10 nf
100 nF
1,000 nF
10,000 nF
100,000 nF

Picofarads (pF)
1 pF
10 pF
100 pF
1,000 pF
10,000 pF
100,000 pF
1,000,000 pF
10,000,000 pF
100,000,000 pF

Tolerance

Code	Percentage
B	$\pm 0.1 \text{ pF}$
C	$\pm 0.25 \text{ pF}$
D	$\pm 0.5 \text{ pF}$
F	$\pm 1\%$
G	$\pm 2\%$
H	$\pm 3\%$
J	$\pm 5\%$
K	$\pm 10\%$
M	$\pm 20\%$
Z	+80%, -20%